


E型电感 E-type high frequency transformer

外形图 Outline Drawing

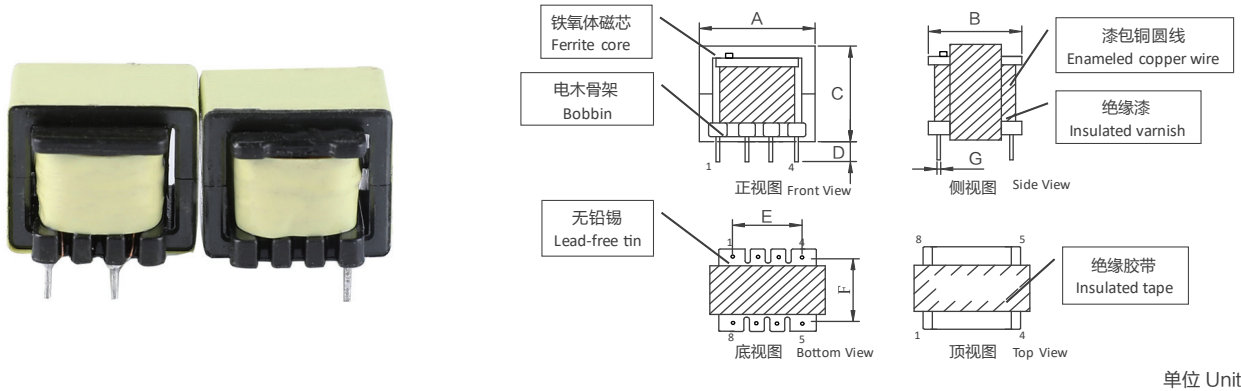

特点 Features

- 符合UL94_V0安规要求
- 符合ROHS, REACH环保要求
- 工作温度范围: -40至+105℃
- 适用于节能灯, LED灯, 驱动电源等, 整流、滤波、隔直线路中
- Comply with UL94_V0 safety requirements
- Comply with REACH, ROHS environmental protection requirements
- Operating temperature range: -40~+105℃
- Suitable for energy saving lamp, LED lamp, driving power supply, etc.

主要用途 Typical Applications

- 广泛用于各种电子电器电工设备的电路中
- Widely used in all kinds of electronic equipment

技术要求 Specifications

引用标准 Reference Standard	GB/T 14860.1 (IEC61248-1)
感量范围 Inductance Range	0.010mH-10.0mH
感量偏差 (1KHz) Inductance Tolerance	±5% (J) ; ±10% (K) ; ±20% (M)
绝缘阻抗 (20℃ ±5℃) Insulation Resistance	100MΩ MIN (100V, 1min)
耐电压 (20℃ ±5℃) Voltage Proof	AC500V / 5mA, 1S

外形尺寸 Dimensions (mm)

注: 外形尺寸可根据用户要求设计。
Notes: The dimensions can be designed as your requirement.

型号 Type	A Max	B Max	C Max	D ±1.0	E ±0.5	F ±0.5	G ±0.10	备注 Notes
EE8.3	9.7	9.5	10.5	3.5	5	6.0	0.50	
EF10	11.5	9.5	10	3.0	5	6.5	0.50	
EE10	12	11.5	13.0	3.5	7.5	8.0	0.50	
EE13	14.5	13.5	13.5	3.5	10	8.5	0.60	
EE13S	14	13	14	2.7	8.5	10	0.6	
EE16	17.5	13.5	16.0	3.5	6	9	0.60	
EE16C	17.5	15.2	13.5	4.0	6	11.5	0.60	
EE19	20.5	15.5	18.5	3.5	10	11	0.60	